




S04DM

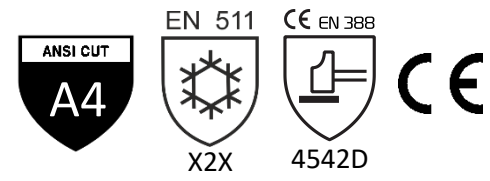

COLD & CUT PROTECTION

TECHNICAL CHARACTERISTICS

- HPPE Gauge 13
- Knuckle Microfoam nitrile coating
- Elastic cuff
- 7 Gauge Fleece inner Liner**

SIZES : **8. 9. 10. 11**

PACKAGING : **Dozen | 120 pairs / box**

BENEFITS

- Superior cut resistant ANSI 4
- Cold resistant
- Excellent abrasion resistant 4/4
- Dexterity
- Flexibility
- Very comfortable

APPLICATIONS

- Outside work
- Refrigeration
- Cutting small dry or oily parts
- Automotive
- Logistics
- Gardening

EN388 : 4542D						
ABRASION	0	1	2	3	4	
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	
PUNCTURE	0	1	2	3	4	
CUT TDM TEST NEW EN388	A	B	C	D	E	F
CONTRE LES CHOCS	X			P		

NORME EN 388
Gloves giving protection from mechanical risks

The pictogram is accompanied by a 4-digit code, 4 or 5 being the best resistance rating.

a b c d

- a** Resistance to abrasion
Between 0 and 4 based on the number of cycles required to abrade through the sample glove (abrasion by sandpaper under a stipulated pressure).
- b** Blade cut resistance
Between 0 and 5, based on the number of cycles required to cut through the sample at a constant speed.
- c** Tear resistance
Between 0 and 4, based on the amount of force required to tear the sample.
- d** Puncture resistance
Between 0 and 4, based on the amount of force required to pierce the sample with a standard sized point.

X means that this performance is not tested.



BCL GLOVE LTD
21 Parc-Industriel, Saint-Pacôme
(Québec) Canada G0L 3X0
T 418 852-2098 F 418 852-3330
info@akka.ca www.akka.ca